




P1000®




DF GR HG PG PI



Ww/100 Ft: 189 Lbs (281 kg/100 m)  
 Allowable Moment 5,070 In-Lbs (570 N-m)  
 12 Gauge Nominal Thickness .105" (2.7mm)

P1001

DF GR HG PG PI




Ww/100 Ft: 378 Lbs (562 kg/100 m)  
 Allowable Moment 14,360 In-Lbs (1,620 N-m)  
 12 Gauge Nominal Thickness .105" (2.7mm)

P1000 DS

P1000 H3 GR HG PG PI

P1000 HS GR HG PG PI

P1000 KO GR PG



Ww/100 Ft: 173 Lbs (257 kg/100 m)

Ww/100 Ft: 175 Lbs (260 kg/100 m)




Ww/100 Ft: 190 Lbs (283 kg/100 m)

Ww/100 Ft: 185 Lbs (275 kg/100 m)

P1000 SI GR HG PG PI

P1000 T DF GR HG PG PI

P1000 WT DF GR HG PG PI



Ww/100 Ft: 185 Lbs (275 kg/100 m)

Ww/100 Ft: 185 Lbs (275 kg/100 m)

Ww/100 Ft: 185 Lbs (275 kg/100 m)


CHANNEL NUTS



Channel Finishes: DF, PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'


1 1/2" System  
Telestrut  
Nuts & Hardware  
General Fittings  
Pipe/Conduit Support  
Concrete Inserts  
Solar  
1 1/4" System  
1 1/2" System  
Special Metals

### P1001 T DFGRPG

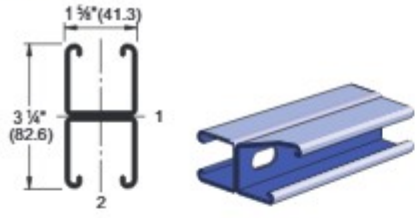


Wt/100 Ft: 321 Lbs (478 kg/100 m)  
Allowable Moment 12,200 In-Lbs (1,378 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1001 A

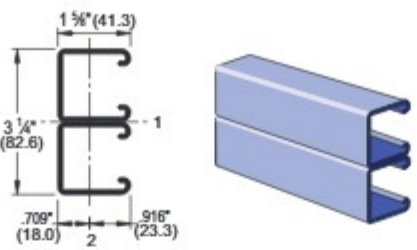


Wt/100 Ft: 378 Lbs (562 kg/100 m)  
Allowable Moment 18,640 In-Lbs (2,110 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1001 B GR PG

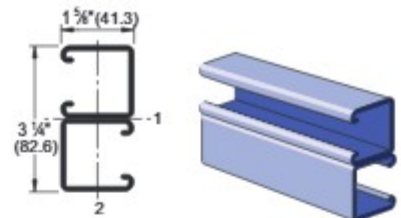


Wt/100 Ft: 378 Lbs (562 kg/100 m)  
Allowable Moment 18,640 In-Lbs (2,110 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1001 C GR PG

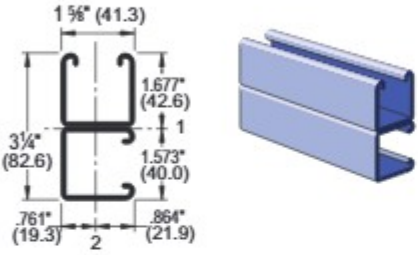


Wt/100 Ft: 378 Lbs (562 kg/100 m)  
Allowable Moment 15,950 In-Lbs (1,800 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1001 3

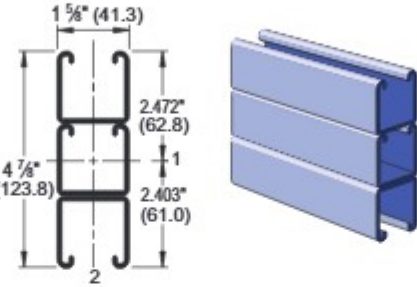


Wt/100 Ft: 566 Lbs (843 kg/100 m)  
Allowable Moment 31,840 In-Lbs (3,600 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1001 A3

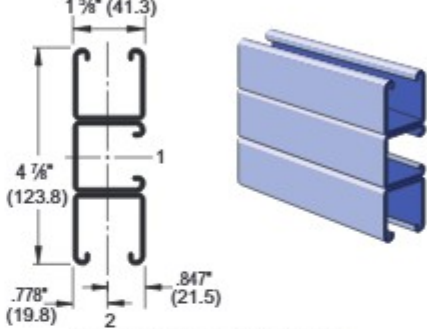


Wt/100 Ft: 566 Lbs (843 kg/100 m)  
Allowable Moment 32,770 In-Lbs (3,700 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1001 B3

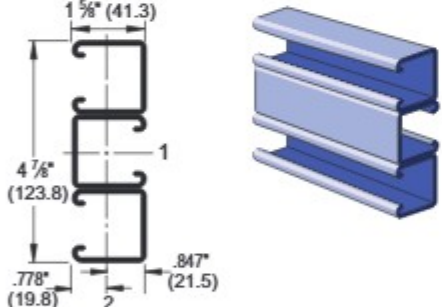


Wt/100 Ft: 566 Lbs (843 kg/100 m)  
Allowable Moment 37,550 In-Lbs (4,240 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1001 D3

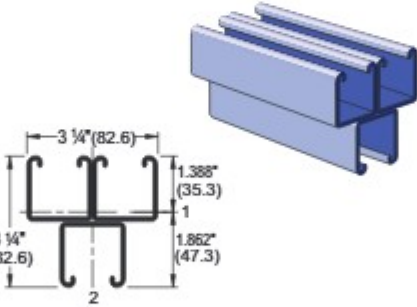


Wt/100 Ft: 566 Lbs (843 kg/100 m)  
Allowable Moment 17,550 In-Lbs (1,980 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1003

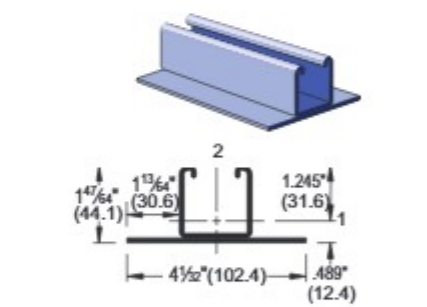


Wt/100 Ft: 333 Lbs (495 kg/100 m)  
Allowable Moment 6,240 In-Lbs (700 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1001 C41

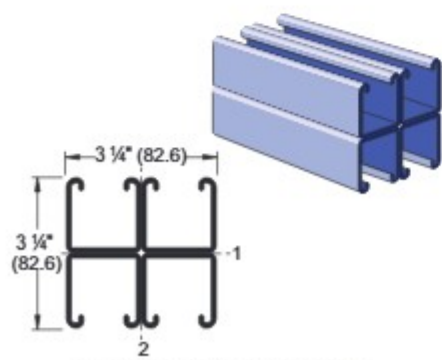


Wt/100 Ft: 755 Lbs (1,124 kg/100 m)  
Allowable Moment 28,720 In-Lbs (3,250 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1001 C3

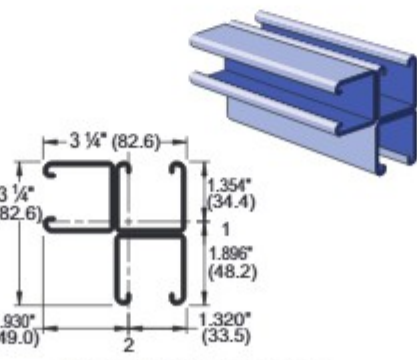

Wt/100 Ft: 566 Lbs (843 kg/100 m)  
Allowable Moment 18,680 In-Lbs (2,110 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

### P1004 A

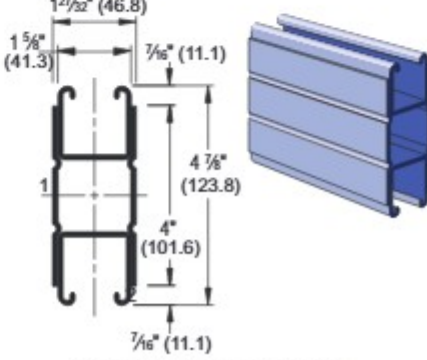

Wt/100 Ft: 668 Lbs (994 kg/100 m)  
Allowable Moment 41,970 In-Lbs (4,740 N·m)  
12 Gauge Nominal Thickness .105" (2.7mm)

Channel Finishes: DF, PL, GR, HG, PG, ZD; Standard Lengths: 10' & 20'